


# retracta<sup>®</sup> hose reels

The Retracta<sup>®</sup> range is serviced easily and incorporates portability and durability. It can be mounted in any orientation indoors or outdoors (including service trucks).



AB100

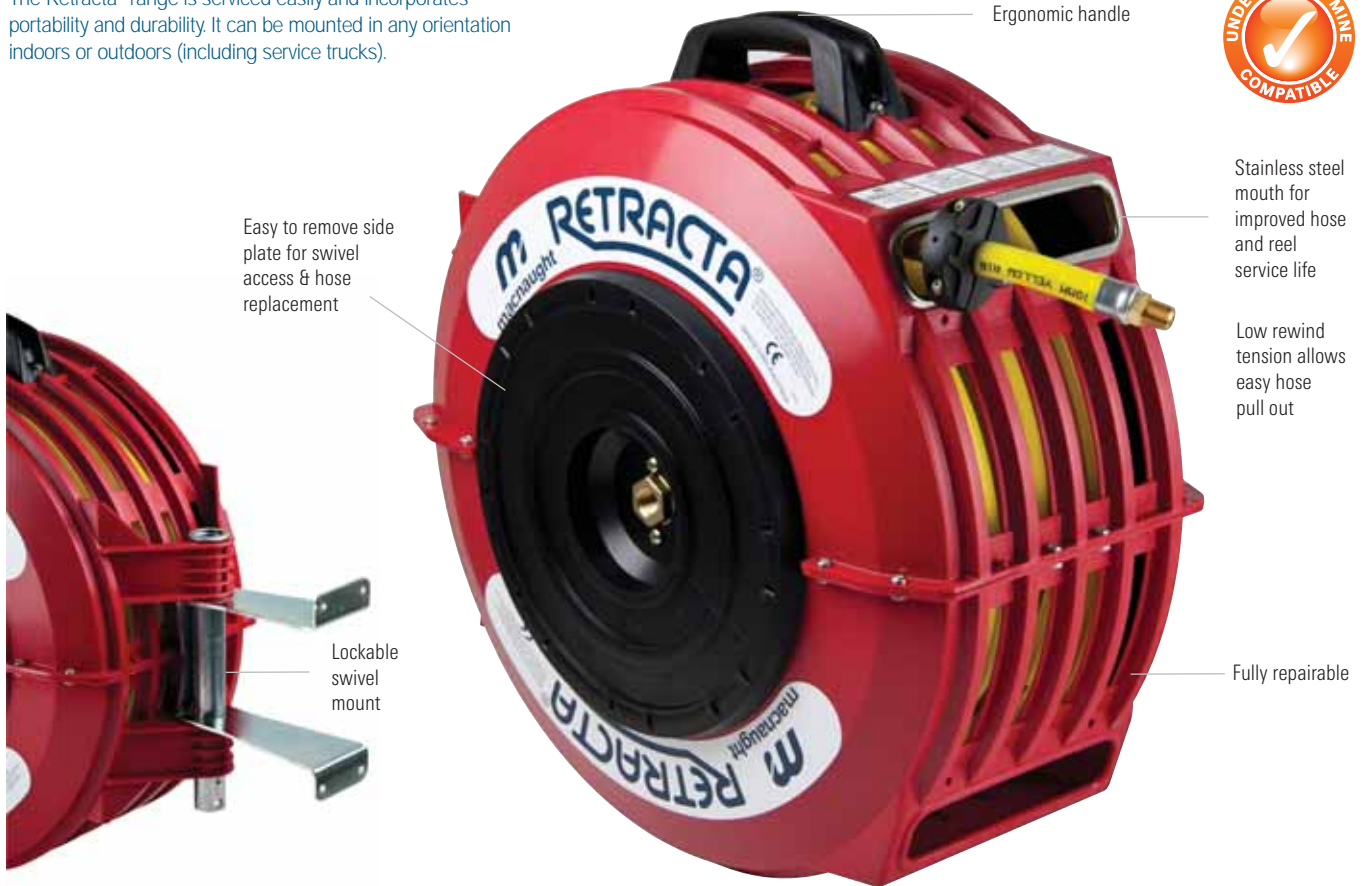

AR100



AR200



AW100



AW150



AW200



CW100



DR100

Description	breathing air	compressed air/water	compressed air/water	compressed air/water	compressed air/water	compressed air/water	cold wash	domestic/garden water
Hose ID	10mm	10mm	12.5mm	10mm	10mm	12.5mm	12.5mm	12.5mm
Hose length	17m	20m	15m	20m	15m	15m	15m	18m
Working pressure	1 700kPa (250psi)	1 700kPa (250psi)	1 700kPa (250psi)	1 700kPa (250psi)	1 700kPa (250psi)	1 700kPa (250psi)	1 000kPa (150psi)	860kPa (125psi)
Hose material	reinforced PVC	superflex PVC	superflex PVC	reinforced PVC	reinforced PVC	reinforced PVC	reinforced PVC	reinforced PVC
Reel colour	blue	red	red	blue	blue	blue	blue	green
Hose colour	yellow	yellow	yellow	blue/yellow	blue/yellow	blue/yellow	white/blue	green/yellow
Max working temp	60°C	60°C	60°C	60°C	60°C	60°C	60°C	60°C
Reel inlet	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Hose outlet	1/4"	1/4"	3/8"	1/4"	1/4"	3/8"	hose nozzle	hose nozzle
Weight	10kg	10kg	10kg	10kg	10kg	10kg	10kg	10kg
Max viscosity	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
Warranty <sup>1</sup>	10 years	10 years	10 years	10 years	10 years	10 years	10 years	10 years
Parts guarantee <sup>2</sup>	10 years	10 years	10 years	10 years	10 years	10 years	10 years	10 years

Note<sup>1</sup> Subject to Macnaught warranty terms and conditions, see inside back cover.  
 Note<sup>2</sup> Parts available for 10 years from deletion or upgrade of model.