



ERGOPACK®

Gas-Powered Backpack Vibrator

Wyco® has your back in concrete consolidation.

Baby your back with the ultra-comfortable and lighter weight Wyco ErgoPack. Operating concrete vibrators is often thought of as back-breaking work – but it doesn't have to be! The Wyco ErgoPack® is the only backpack vibrator on the market to offer an ergonomic design where the engine weight is properly supported by the operator's hips. In addition, the redesigned gears provide more efficient output delivering maximum power to the shaft and head for tough consolidation jobs. Try on the Wyco ErgoPack today!

Features include . . .

- Super comfortable at only 30 pounds
- Honda 4 cycle engine with a heavy-duty clutch
- Lock-in and controlled speed feature with digital read-out
- Drive gears for more efficient output and no belts to slip, break or maintain
- Quick Disconnect (QD) compatible with the Wyco Electric Motors
- Runs all Wyco heads and shafts




Comfortable strapping distributes weight on hips and not on the operators back



 **Backpack Vibrator**

Wyco ErgoPack® Vibrator and Components

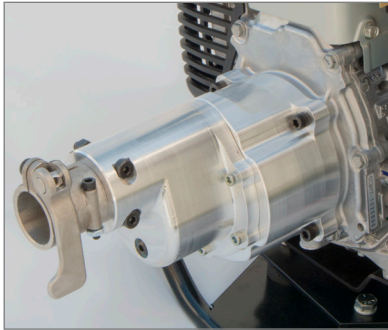

Extended Gear and Bearing Life

Speed increaser doubles engine speed and durable gears and bearings extend product life. No belts to slip, break or maintain.

Interchangeable Quick

Disconnect – Backpack QD fits on the electric product.



Backpack comes with locking adjustment so operator can lock in proper speed needed for the job.



Visual Readout

Digital tachometer displays, engine rpm so operator can monitor vibration speed (vpm = 2X rpm) and tracks running hours to assist in preventative maintenance.

Head and Shaft Ordering Information

Vibrator Motor	Flexible Shafts (Core & Casing)		Square Heads		VPM
Part No.	Length	Part No.	Size	Part No. (Model No.)	Range
W402558 (Engine Assembly with Quick Disconnect)	7'	W988-907	13/16"	W877-520 (750-D)	6000 - 14,000
	10'	W988-910			
	14'	W988-914			
	7'	W988-907	1"	W877-526 (750-EH)	
	10'	W988-910			
	14'	W988-914			
	7'	W989-509	1-3/8"	W878-533 (750-FI)	
	10'	W989-512			
	14'	W989-514			
	7'	W989-509	1-3/4"	W878-540 (750-GI)	
	10'	W989-512			
	14'	W989-514			
	7'	W989-509	2"	W878-563 (750-LI)	
	10'	W989-512			
	14'	W989-514			
	7'	W989-509	2-1/2" x 4"	W877-512 (750-SBI)	
	10'	W989-512			
	14'	W989-514			
	7'	W989-509	1/3/4" Poly	W878-534 (750-FIPC)	
	10'	W989-512			
14'	W989-514				

Note: **W989-509** and **W989-512** shafts have a reinforcing spring and molded quick disconnect. All other shafts are threaded and require a quick disconnect adapter.

Trademarks appearing in this document are the property of their respective entities.

Due to continuous research, product improvements and enhancements, Badger Meter reserves the right to change product or system specifications without notice, except to the extent an outstanding contractual obligation exists. © 2016 Badger Meter, Inc. All rights reserved.

wycosales@badgermeter.com | www.wycotool.com

Phone: 800-233-9926 | Fax: 888-992-6872

Wyco | 8635 Washington Avenue | Racine, WI 53406-3738 USA

VBR-SB-00818-EN-04 (July 2018)